




MD-5008



1. 打开电源开关，将灵敏度调到最大，将频率调到12.5kHz，将深度调到最大，将音量调到最大，将模式调到DISC，将识别调到ALL，将平衡调到平衡，将探测线圈埋入地下，按下探测按钮，听到蜂鸣声，表示有金属物体。

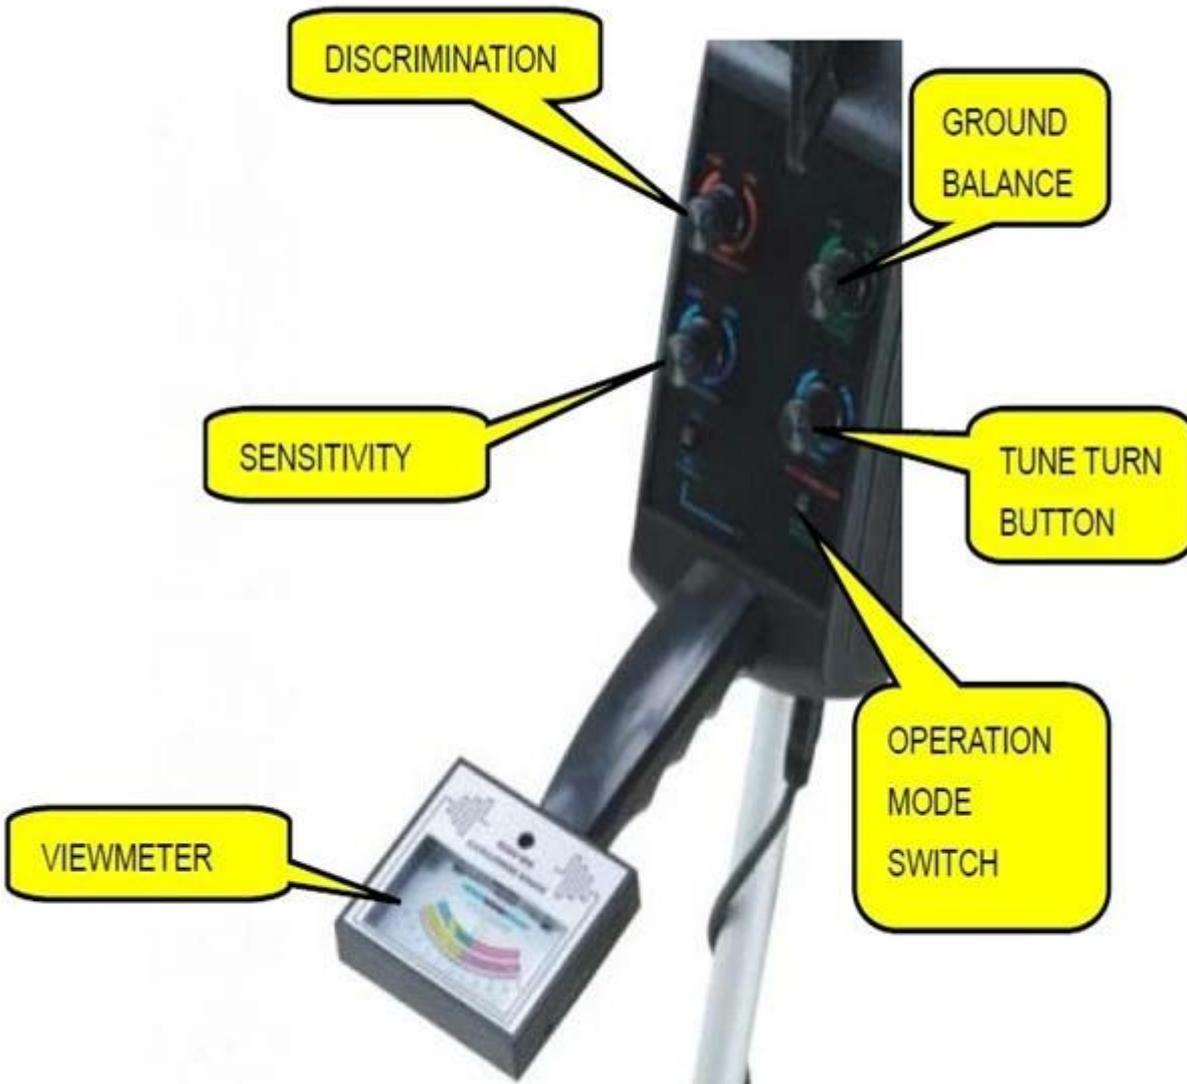

- \*DC 12V
- \*7kHz
- \*400HZ



- Small 25-30cm USD25
- 35-40cm USD25
- \*Small 1.5
- 3.0-3.5
- 60x60x1



- \*820L X 170W X 320H
- \*3.2
- \*21.2kgs
- \*12.4kgs
- \*680L X 340W X 845H